

# AC 46

## Self Contained Ice Machine up to 25 kg

Item #:
Project:
Quantity:



### FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front panel mount ON-OFF switch.
- Ergonomically designed ice storage access, with disappearing door.
- Door-closing movement dampening system.



AC M 46  
Medium Gourmet 20 g  
Ø 30 x H 34 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### INTERNAL BIN CAPACITY

9 kg

### REFRIGERANT GAS

R134a

### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine up to 25 kg

# AC 46

## Self Contained Ice Machine up to 25 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 25 kg

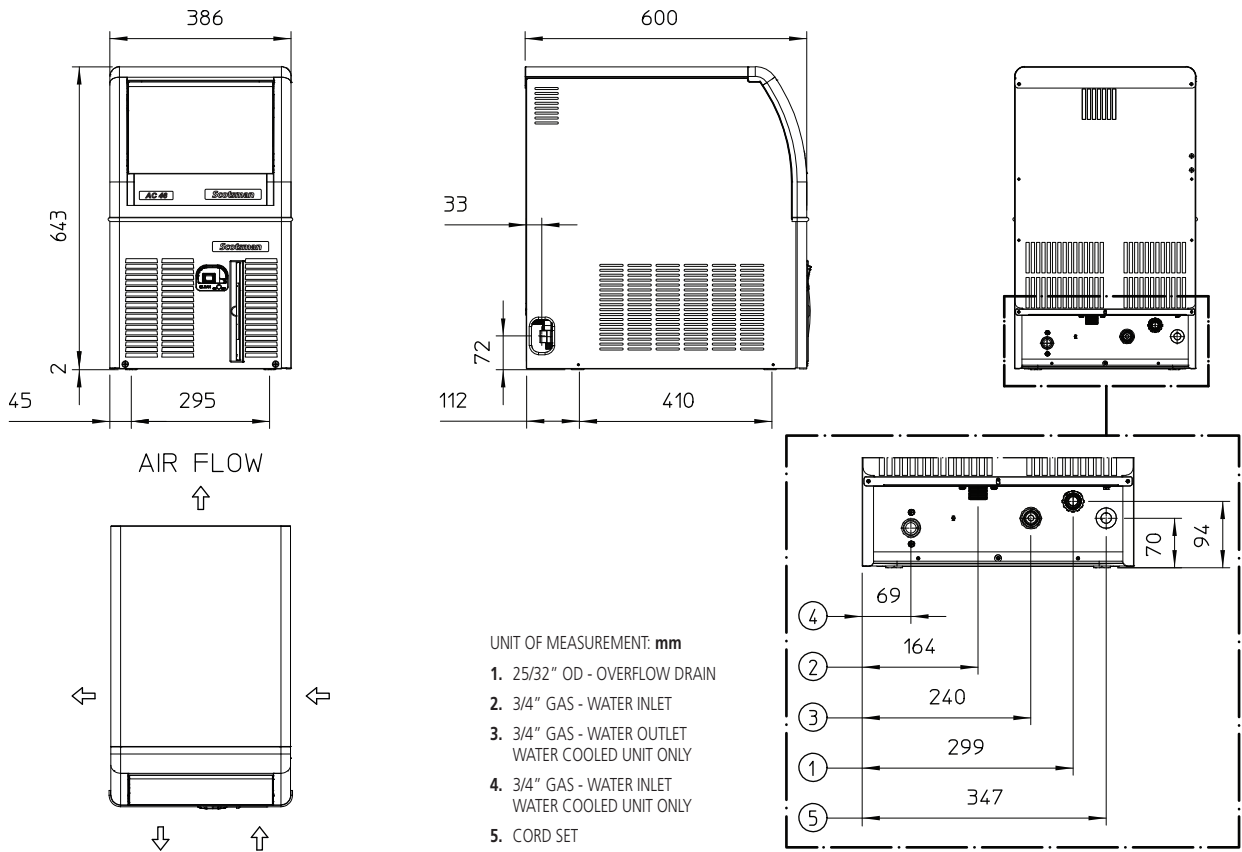

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm <sup>2</sup>	A
Size (W x D x H)	386 x 600 x 645 mm		AC M 46 AS	230/50/1	2730	800	3	1.5	10
Net weight	35 kg		AC M 46 WS	230/50/1	2730	800	3	1.5	10
SHIPPING DATA			AC M 46 AS	230/60/1	3071	900	3	1.5	10
			AC M 46 WS	230/60/1	3071	900	3	1.5	10
Carton (W x D x H)	460 x 670 x 760 mm								
Weight	42 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AC M 46 AS	Air	230/50/1	25	23	19	40.8	8.0	3.2	350
AC M 46 WS	Water	230/50/1	25	23	21	31.0	6.5	27.3	350
AC M 46 AS	Air	230/60/1	25	24	20	42.3	8.3	3.4	450
AC M 46 WS	Water	230/60/1	25	24	20	42.3	8.3	27.3	450

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions